


PRODUCT-DETAILS

AFC09-22-00-81

AFC09-22-00-81 24V 50/60Hz Contactor

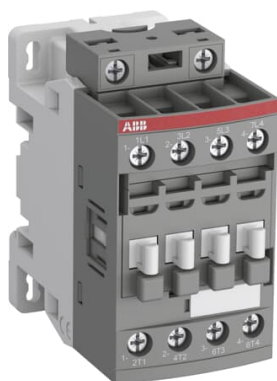

General Information

| | |
|-----------------------|---|
| Extended Product Type | AFC09-22-00-81 |
| Product ID | 1SBL131501R8100 |
| EAN | 3471523014077 |
| Catalog Description | AFC09-22-00-81 24V 50/60Hz Contactor |
| Long Description | The AFC09-22-00-81 is a 4 poles (2 N.O + 2 N.C) - 690 V IEC or 600V UL contactor with screw terminals, mainly controlling power circuits up to 4 kW / 400 V AC (AC-3) or 5 hp / 480 V AC UL and 25 A (AC-1) or 25 A UL general use. Within the AF platform, AFC contactors offer an optimized operating time for AC controlled applications with electromagnetic coil (control voltage : 24 V AC 50/60 Hz). AFC contactors have a block type design and can be easily extended with add-on auxiliary contact blocks and a wide range of additional accessories. |

Ordering

| | |
|------------------------|----------|
| Minimum Order Quantity | 1 piece |
| Customs Tariff Number | 85364900 |

Popular Downloads

| | |
|-----------------------------------|-----------------|
| Data Sheet, Technical Information | 1SBC100219C0201 |
| Instructions and Manuals | 1SBC101059M6801 |

Dimensions

| | |
|----------------------------|----------|
| Product Net Width | 45 mm |
| Product Net Depth / Length | 77 mm |
| Product Net Height | 86 mm |
| Product Net Weight | 0.309 kg |

Technical

| | |
|---|--|
| Number of Main Contacts NO | 2 |
| Number of Main Contacts NC | 2 |
| Number of Auxiliary Contacts NO | 0 |
| Number of Auxiliary Contacts NC | 0 |
| Standards | IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1, UL 508, CSA C22.2 N° 14 |
| Rated Operational Voltage | Main Circuit 690 V |
| Rated Frequency (f) | Auxiliary Circuit 50 / 60 Hz Main Circuit 50 / 60 Hz |
| Conventional Free-air Thermal Current (I _{th}) | acc. to IEC 60947-4-1, Open Contactors q = 40 °C 35 A |
| Rated Operational Current AC-1 (I _e) | (690 V) 40 °C 25 (690 V) 60 °C 25 A (690 V) 70 °C 22 |
| Rated Operational Current AC-3 (I _e) | (415 V) 60 °C 9 A (440 V) 60 °C 9 A (500 V) 60 °C 9.5 A (690 V) 60 °C 7 A (380 / 400 V) 60 °C 9 A (220 / 230 / 240 V) 60 °C 9 A |
| Rated Operational Power AC-3 (P _e) | (400 V) 4 kW (415 V) 4 kW (440 V) 4 kW (500 V) 5.5 kW (690 V) 5.5 kW (380 / 400 V) 4 kW (220 / 230 / 240 V) 2.2 kW |
| Rated Short-time Withstand Current Low Voltage (I _{cw}) | at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 150 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 35 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 60 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 300 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 80 A for 1 s -empty- A |
| Maximum Breaking Capacity | cos phi=0.45 (cos phi=0.35 for I _e > 100 A) at 440 V 250 A cos phi=0.45 (cos phi=0.35 for I _e > 100 A) at 690 V 106 A |
| Maximum Electrical Switching Frequency | (AC-1) 600 cycles per hour (AC-15) 0 cycles per hour (AC-2 / AC-4) 0 cycles per hour (AC-3) 0 cycles per hour (DC-13) 0 cycles per hour |
| Rated Insulation Voltage (U _i) | acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 690 V acc. to IEC 60947-5-1 and VDE 0110 (Gr. C) 690 V acc. to UL/CSA 600 V |
| Rated Impulse Withstand Voltage (U _{imp}) | 6 kV |
| Maximum Mechanical Switching Frequency | 3600 cycles per hour |
| Rated Control Circuit Voltage (U _c) | 50 Hz 24 V 60 Hz 24 V |
| Operate Time | Between Coil De-energization and NC Contact Closing 9 ... 20 ms Between Coil De-energization and NO Contact Opening 4 ... 18 ms |

| | |
|--|---|
| | Between Coil Energization and NC Contact Opening 7 ... 21 ms Between Coil Energization and NO Contact Closing 10 ... 26 ms |
| Connecting Capacity Main Circuit | Flexible with Ferrule 1/2x 0.75 ... 6 mm ² Flexible with Insulated Ferrule 1x 0.75 ... 4 mm ² Flexible with Insulated Ferrule 2x 0.75 ... 2.5 mm ² Rigid 1/2x 1 ... 6 mm ² |
| Connecting Capacity Auxiliary Circuit | Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 2x 0.75 ... 1.5 mm ² Flexible with Insulated Ferrule 1x 0.75 ... 2.5 mm ² |
| Connecting Capacity Control Circuit | Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 1x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 2x 0.75 ... 1.5 mm ² Rigid 1/2x 1 ... 2.5 mm ² |
| Wire Stripping Length | Control Circuit 10 mm Main Circuit 10 mm |
| Degree of Protection | acc. to IEC 60529, IEC 60947-1, EN 60529 Coil Terminals IP20 acc. to IEC 60529, IEC 60947-1, EN 60529 Main Terminals IP20 |
| Terminal Type | Screw Terminals |

Technical UL/CSA

| | |
|------------------------------|---|
| General Use Rating UL/CSA | (600 V AC) 25 A |
| Tightening Torque UL/CSA | Control Circuit 11 in-lb Main Circuit 13 in-lb |

Environmental

| | |
|---|--|
| Ambient Air Temperature | Close to Contactor for Storage -60 ... +80 °C Near Contactor for Operation in Free Air (0.85 ... 1.1 Uc) -40 ... 60 °C Near Contactor for Operation in Free Air (Uc) -40 ... 70 °C |
| Climatic Withstand | Category B according to IEC 60947-1 Annex Q |
| Maximum Operating Altitude Permissible | Without Derating 3000 m |
| Resistance to Vibrations acc. to IEC 60068-2-6 | 5 ... 300 Hz 4 g closed position / 2 g open position |
| Resistance to Shock acc. to IEC 60068-2-27 | Closed, Shock Direction: B1 25 g Open, Shock Direction: B1 5 g Shock Direction: A 30 g Shock Direction: B2 15 g Shock Direction: C1 25 g Shock Direction: C2 25 g |

Certificates and Declarations (Document Number)

| | |
|------------------------------------|-------------------------|
| CB Certificate | CB_SE-96551M1 |
| CQC Certificate | CQC2010010304445624 |
| Declaration of Conformity - CCC | 2020980304001253 |
| Declaration of Conformity - CE | 1SBD250025U1000 |
| Instructions and Manuals | 1SBC101059M6801 |
| RoHS Information | 1SBD251089E1000 |
| UL Certificate | UL_20191021-E312527_7_1 |

Container Information

| | |
|-----------------------------------|-------------|
| Package Level 1 Units | box 1 piece |
| Package Level 1 Width | 87 mm |
| Package Level 1 Depth / Length | 79 mm |

| | |
|------------------------------|---------------|
| Package Level 1 Height | 47 mm |
| Package Level 1 Gross Weight | 0.309 kg |
| Package Level 1 EAN | 3471523014077 |
| Package Level 3 Units | 1296 piece |

Classifications

| | |
|----------------------------|--|
| Object Classification Code | Q |
| ETIM 6 | EC000066 - Power contactor, AC switching |
| ETIM 7 | EC000066 - Power contactor, AC switching |
| eClass | V11.0 : 27371003 |

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors

