


PRODUCT-DETAILS

AF140B-30-22RT-13

AF140B-30-22RT-13 Contactor

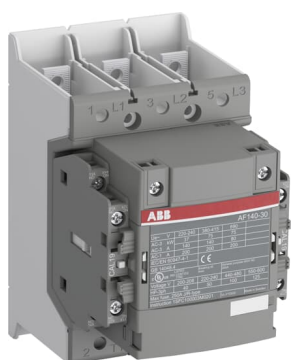

General Information

Extended Product Type	AF140B-30-22RT-13
Product ID	1SFL447062R1322
EAN	7320500509876
Catalog Description	AF140B-30-22RT-13 Contactor
Long Description	A 3-pole Contactor suitable for Railway applications such as Motor starting, Isolation, By-pass and Distribution application up to max 690 V. Operated with wide control voltage range 100-250 V, 50 /60 Hz and DC

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85364900

Popular Downloads

Data Sheet, Technical Information	1SBC100192C0204
Instructions and Manuals	1SFC100003M0201

Dimensions

Product Net Width	90 mm
Product Net Depth /	126 mm

Length

Product Net Height	150 mm
Product Net Weight	1.3 kg

Technical

Number of Main Contacts NO	3
Number of Main Contacts NC	0
Number of Auxiliary Contacts NO	2
Number of Auxiliary Contacts NC	2
Standards	IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-4-1, CSA C22.2 No. 60947-4-1, IEC 60077-1 (applicable parts), IEC 60077-2 (applicable parts), EN 50155 (applicable parts), TR CU 001/2011, IEC 61373, For compliance confirmation on applicable parts based on your application and combination, please consult your ABB sales representatives.
Rated Operational Current AC-1 (I_e)	(690 V) 40 °C 200 (690 V) 60 °C 175 A (690 V) 70 °C 160
Rated Operational Current AC-3 (I_e)	(415 V) 55 °C 140 A (440 V) 55 °C 140 A (500 V) 55 °C 130 A (690 V) 55 °C 80 A (380 / 400 V) 55 °C 140 A (220 / 230 / 240 V) 55 °C 140
Rated Operational Power AC-3 (P_e)	(415 V) 75 kW (440 V) 90 kW (500 V) 90 kW (690 V) 75 kW (380 / 400 V) 75 kW (220 / 230 / 240 V) 37 kW
Rated Short-time Withstand Current Low Voltage (I_{cw})	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 1168 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 200 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 477 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 1460 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 674 A
Mechanical Durability	5 million
Maximum Mechanical Switching Frequency	300 cycles per hour
Rated Control Circuit Voltage (U_c)	50 Hz / 60 Hz 100 ... 250 V DC Operation 100 ... 250 V
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 6 V-A Holding at Max. Rated Control Circuit Voltage 60 Hz 6 V-A Pull-in at Max. Rated Control Circuit Voltage 50 Hz 130 V-A Pull-in at Max. Rated Control Circuit Voltage 60 Hz 130 V-A Pull-in at Max. Rated Control Circuit Voltage DC 135 W
Terminal Type	Main Circuit: Bars

Environmental

RoHS Status	Following EU Directive 2011/65/EU
-------------	-----------------------------------

Certificates and Declarations (Document Number)

CB Certificate	SEMKO_SE-70479M1
CQC Certificate	CQC2013010304604055
cUL Certificate	20120925-E36588
Declaration of Conformity - CCC	2020980304001304
Declaration of	2CMT2015-005440

Conformity - CE

EAC Certificate	9AKK107046A8618
Instructions and Manuals	1SFC100003M0201
RoHS Information	2CMT2015-005440

Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	207 mm
Package Level 1 Depth / Length	216 mm
Package Level 1 Height	150 mm
Package Level 1 Gross Weight	1.5 kg
Package Level 1 EAN	7320500509876

Classifications

Object Classification Code	Q
ETIM 4	EC000066 - Magnet contactor, AC-switching
ETIM 5	EC000066 - Magnet contactor, AC-switching
ETIM 6	EC000066 - Power contactor, AC switching
ETIM 7	EC000066 - Power contactor, AC switching
eClass	V11.0 : 27371003
UNSPSC	39121529
IDEA Granular Category Code (IGCC)	4755 >> Contactors

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors

