


PRODUCT-DETAILS

AF1250-30-00-70

AF1250-30-00-70 Contactor

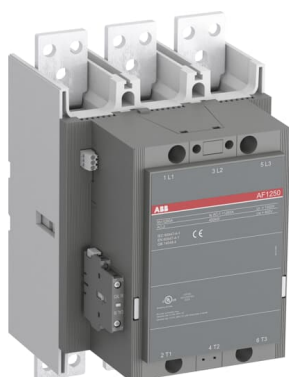

General Information

Extended Product Type	AF1250-30-00-70
Product ID	1SFL647001R7000
EAN	7320500514030
Catalog Description	AF1250-30-00-70 Contactor

Long Description

The AF1250-30-00-70 is a 3 pole - 1000 V IEC or 600 V UL contactor with Main Circuit Bars, switching power circuits up to 1260 A (AC-1) or 1210 A UL general use. Thanks to the AF technology, the contactor has a wide control voltage range (100-250 V 50/60 Hz and DC), managing large control voltage variations, reducing panel energy consumptions and ensuring distinct operations in unstable networks. Furthermore, surge protection is built-in, offering a compact solution. AF contactors have a block type design, can be easily extended with add-on auxiliary contact blocks and an additional wide range of accessories.

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85364900

Popular Downloads

Instructions and Manuals	1SFC380023-en
--------------------------	---------------

Dimensions

Product Net Width	210 mm
Product Net Depth / Length	242 mm
Product Net Height	344 mm
Product Net Weight	14.6 kg

Technical

Number of Main Contacts NO	3
Number of Main Contacts NC	0
Number of Auxiliary Contacts NO	0
Number of Auxiliary Contacts NC	0
Rated Operational Current AC-1 (I _e)	(1000 V) 40 °C 1260 A (1000 V) 55 °C 1040 A (1000 V) 70 °C 875 A (690 V) 40 °C 1260 (690 V) 55 °C 1040 (690 V) 70 °C 875
Rated Insulation Voltage (U _i)	acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 V acc. to UL/CSA 600 V
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 12 V-A Holding at Max. Rated Control Circuit Voltage 60 Hz 12 V-A Pull-in at Max. Rated Control Circuit Voltage 50 Hz 880 V-A Pull-in at Max. Rated Control Circuit Voltage 60 Hz 880 V-A Pull-in at Max. Rated Control Circuit Voltage DC 880 V-A

Technical UL/CSA

Maximum Operating Voltage UL/CSA	Main Circuit 1000 V
General Use Rating UL/CSA	(1000 V AC) 1210 A

Environmental

RoHS Status	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019
-------------	--

Certificates and Declarations (Document Number)

ABS Certificate	15-LD1408622-PDA
BV Certificate	BV_13409-C0BV
CB Certificate	SE-82865
CCS Certificate	GB14T00030
CQC Certificate	CQC2006010304213519 CQC2012010304540079
cUL Certificate	UL_20130930-E73397
Declaration of Conformity - CCC	2020980304001302 2020980304001044
Declaration of Conformity - CE	2CMT2019-005796
DNV GL Certificate	TAE00001W1
EAC Certificate	9AKK107046A8618
Environmental Information	1SAC200045H0007
Instructions and Manuals	1SFC380023-en

LR Certificate	16-20064
PRS Certificate	TE_2092_880423_16
RINA Certificate	ELE060313XG_002
RMRS Certificate	9AKK107045A6978
RoHS Information	2CMT2019-005796
UL Listing Card	UL_E73397

Container Information

Package Level 1 Width	280 mm
Package Level 1 Depth / Length	375 mm
Package Level 1 Height	310 mm
Package Level 1 Gross Weight	16 kg

Classifications

Object Classification Code	Q
ETIM 6	EC000066 - Power contactor, AC switching
ETIM 7	EC000066 - Power contactor, AC switching
eClass	V11.0 : 27371003
UNSPSC	39121529
IDEA Granular Category Code (IGCC)	4755 >> Contactors

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors

