


PRODUCT-DETAILS

AF1250H-30-11-71

AF1250H-30-11 250-500V AC/DC Contactor

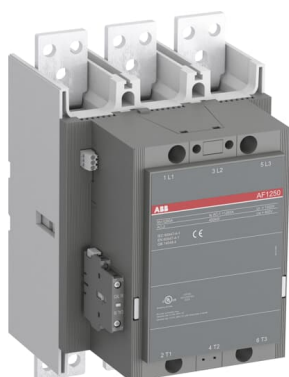

General Information

Extended Product Type	AF1250H-30-11-71
Product ID	1SFL647088R7111
EAN	7320500508879
Catalog Description	AF1250H-30-11 250-500V AC/DC Contactor

Long Description

The AF1250H-30-11-71 is a 3 pole - 1000 V IEC or 600 V UL contactor with pre-mounted auxiliary contacts and Main Circuit Bars, switching power circuits up to 1260 A (AC-1). Thanks to the AF technology, the contactor has a wide control voltage range (250-500 V 50/60 Hz and DC), managing large control voltage variations, reducing panel energy consumptions and ensuring distinct operations in unstable networks. Furthermore, surge protection is built-in, offering a compact solution. AF contactors have a block type design, can be easily extended with add-on auxiliary contact blocks and an additional wide range of accessories.

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85364900

Popular Downloads

Instructions and Manuals	1SFC380023-en
--------------------------	---------------

Dimensions

Product Net Width	210 mm
Product Net Depth / Length	242 mm
Product Net Height	344 mm
Product Net Weight	14.6 kg

Technical

Number of Main Contacts NO	3
Number of Main Contacts NC	0
Number of Auxiliary Contacts NO	1
Number of Auxiliary Contacts NC	1
Rated Operational Current AC-1 (I _e)	(1000 V) 40 °C 1260 A (1000 V) 55 °C 1040 A (1000 V) 70 °C 875 A (690 V) 40 °C 1260 A (690 V) 60 °C 1040 A (690 V) 70 °C 875 A
Rated Short-time Withstand Current Low Voltage (I _{cw})	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 7200 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 1500 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 4000 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 8000 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 5200 A
Rated Insulation Voltage (U _i)	acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 V acc. to UL/CSA 600 V
Mechanical Durability	0.5 million
Maximum Mechanical Switching Frequency	300 cycles per hour
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 12 V-A Holding at Max. Rated Control Circuit Voltage 60 Hz 12 V-A Pull-in at Max. Rated Control Circuit Voltage 50 Hz 985 V-A Pull-in at Max. Rated Control Circuit Voltage 60 Hz 985 V-A Pull-in at Max. Rated Control Circuit Voltage DC 910 V-A

Environmental

RoHS Status	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019
-------------	--

Certificates and Declarations (Document Number)

CB Certificate	SE-82865
CQC Certificate	CQC2012010304540079
Declaration of Conformity - CCC	2020980304001044
Declaration of Conformity - CE	2CMT2019-005796
Instructions and Manuals	1SFC380023-en
RoHS Information	2CMT2019-005796

Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	280 mm
Package Level 1 Depth / Length	375 mm

Package Level 1 Height	310 mm
Package Level 1 Gross Weight	16 kg
Package Level 1 EAN	7320500508879

Classifications

Object Classification Code	Q
ETIM 4	EC000066 - Magnet contactor, AC-switching
ETIM 5	EC000066 - Magnet contactor, AC-switching
ETIM 6	EC000066 - Power contactor, AC switching
ETIM 7	EC000066 - Power contactor, AC switching
eClass	V11.0 : 27371003
UNSPSC	39121529
IDEA Granular Category Code (IGCC)	4755 >> Contactors

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors

